


Technical Data Sheet

Web Devices Fall Arrest Systems

Model# CONN-660L2

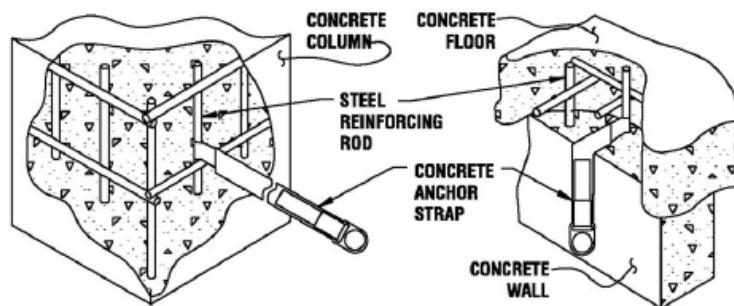

Description:

- Concrete Anchor Strap
- 6ft. (additional lengths available)
- Red Polyester Webbing with a Loop and D-Ring
- Tubular Web Wear Pad Running Length of Strap
- 5,000 lbs Rated Anchor Point

Technical:

Part Number:	CONN-660L2g
Capacity Load:	400 lbs.
Web Tensile Strength:	6,000 lbs. (Red)
Material Web:	Polyester
D-Ring Load Rating:	5,000 lbs.
D-Ring Tensile Strength:	5,000 lbs.
Material D-Ring:	Yellow Chromate Forged Steel
Standards:	ANSI Z359.1-07

All elements and sub-assemblies meet or exceed ANSI Z359.1-2007. Full assembly meets ANSI Z359.1. Feet and head first fall requirements meet or exceed ANSI Z359.1-2007. Compliant fall protection and emergency rescue systems help prevent serious injury during fall arrest. Users must read and understand the *User Instructions* provided with the product and be properly trained by their employer prior to use per OSHA 29 CFR 1910.66 and 1926.503 or applicable local standards. Users must follow intended use and maintenance of the product. Alterations, misuse or failure to follow warnings and User Instructions may result in serious personal injury or death.